

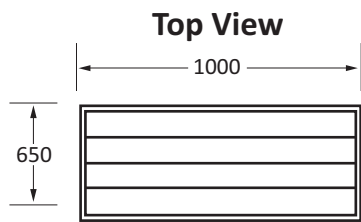
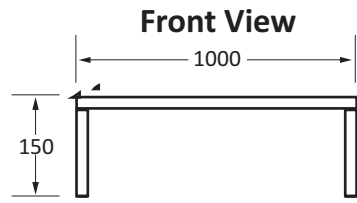




TECHNICAL INFORMATION & FEATURES







DUNNAGE RACK

- The frame shall be manufactured from 25 x 25 x 1.2 mm square tubing
- The racks shall be manufactured from 20 x 20 x 1.2 mm square tubing
- The legs shall be manufactured from 31 x 1.5 mm round tubing
- Tubing ends are finished with plastic end caps
- The mild steel units shall be finished in Hammertone grey
- Pack size 1000 x 650 x 150 mm
- Weight 20 Kg for mild steel
- Weight 22 Kg for stainless steel



MEAT TROUGH

- The trough shall be manufactured from 1.2 mm 430 No 4 P.V.C coated stainless steel
- The trough shall have a cut out to accommodate mincer neck
- The frame shall be manufactured from 40 x 40 x 3 mm mild steel iron
- The legs shall be manufactured from 42 x 2 mm mild steel round tubing
- The mild steel components are spray painted with Hammertone grey
- Unit is fitted with 75 mm rubber swivel caster wheels
- Pack size 1160 x 760 x 800 mm
- Weight 33 Kg

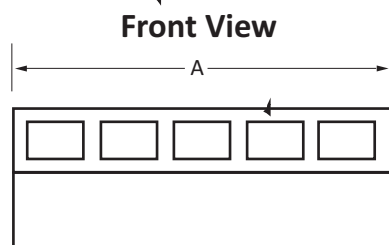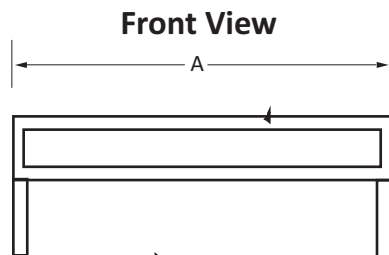

CONDIMENT RACKS

Stranded

- The frame shall be manufactured from 25 x 25 x 1.2 mm stainless steel
- Tubing ends are finished with plastic end caps
- Table or wall mounted options
- Pack size length x 200 x 210 mm
- Weight 2.2 Kg per meter

Solid

- The body shall be manufactured from 1.0 mm 430 No 4 P.V.C coated stainless steel
- Table or wall mounted options
- Pack size Length x 200 x 210 mm
- Weight 4 Kg per meter